



1 PRODUCT OVERVIEW


THESE INSTRUCTIONS
ARE FOR 13MM
PLASTERBOARD
INSTALLATIONS ONLY.



DOWNHILL DAN 14



FLAT FREDDIE 14




TRIMLESS TIM 15

2 CREATE RECESS

1. MOUNT A 140MMX35MM TIMBER CEILING BATTEN (OR SIMILAR).

2. CREATE A SLOT IN PLASTERBOARD AND MOUNT TO CEILING
(OR MARK FOR CUTTING LATER).

SLOT DIMENSIONS FOR 13MM PLASTERBOARD:
DOWNHILL DAN 14 - 24MM
TRIMLESS TIM 15 - 24MM

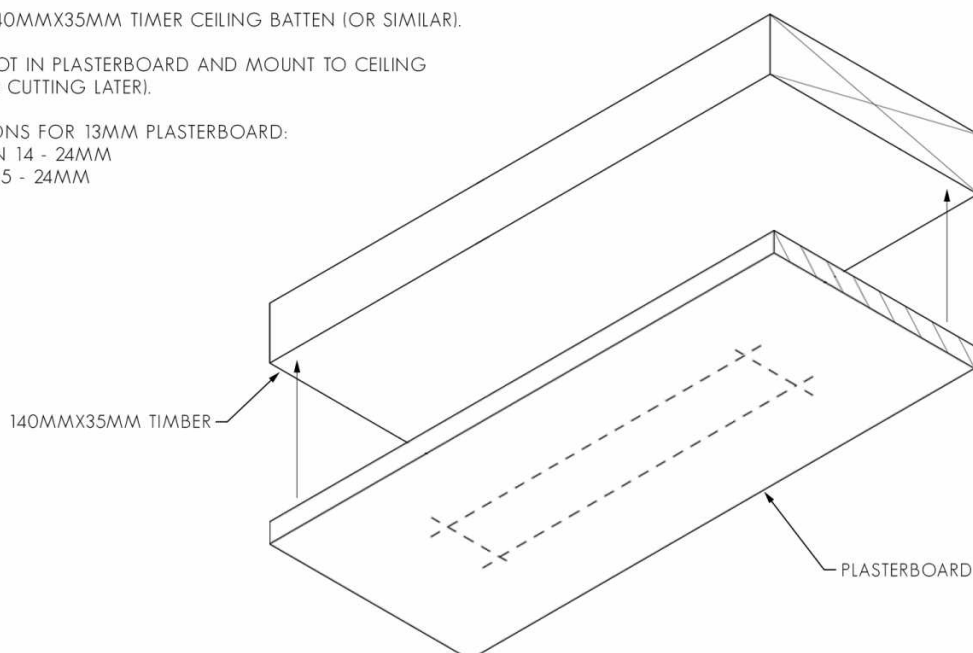

3 PLASTER AND PAINT


1. CREATE PLASTERING EDGES USING GIB P26 STOPPING ANGLE
(OR SIMILAR) FOR 13MM PLASTERBOARD. USE A SPACER TO ENSURE
SLOT IS PARALLEL ALONG THE FULL LENGTH.

FINISHED SLOT SIZES WITH STOPPING ANGLE INSTALLED SHOULD BE:
DOWNHILL DAN 14 - 20MM
TRIMLESS TIM 15 - 20MM

2. STOP PLASTER UP TO STOPPING ANGLE.

PLASTER FINISH IS CRITICAL AS THIS LIGHT
SOURCE MAY EXAGGERATE IMPERFECTIONS
IN PLASTER FINISH. IT IS RECOMMENDED
TO WASH A LIGHT SOURCE ACROSS SURFACE
TO CHECK FOR IMPERFECTIONS IN PLASTER
BEFORE COMPLETING.

3. PAINT PLASTER AND PLASTERBOARD.

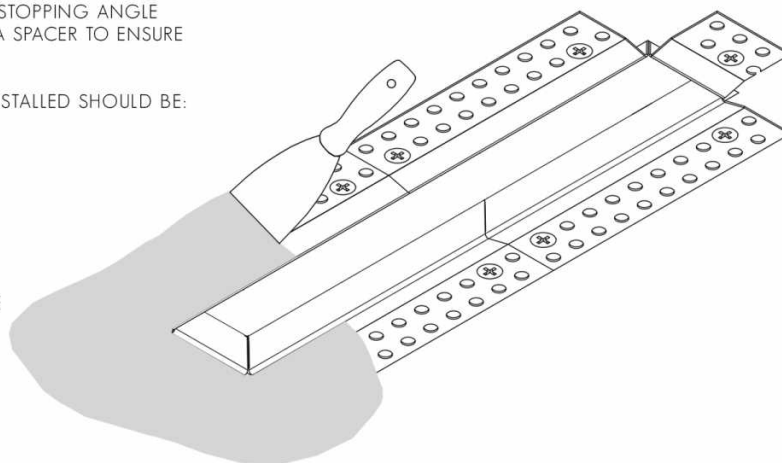

4

INSTALL EXTRUSION, END CAPS AND MAKE ELECTRICAL CONNECTION

1. FEED LED STRIP TAILS (OR CABLE) THROUGH HOLE IN EXTRUSION AND CLAMP USING CORD GRIP (IF SUPPLIED). (SEE FIG. 1). DO NOT INSTALL LED STRIP AT THIS POINT.

2. MAKE ELECTRICAL CONNECTION: CONNECT LED STRIP TAILS TO LED DRIVER (SEE FIG. 2 IF SUPPLIED WITH MALE/FEMALE CONNECTORS).

3. INSERT END CAPS INTO EXTRUSION.

4. IF USING MULTIPLE LENGTHS OF EXTRUSION, SLIDE EXTRUSIONS TOGETHER ON TO JOINER OR BEND PLATE.

5. SCREW FIX EXTRUSION INTO RECESS.

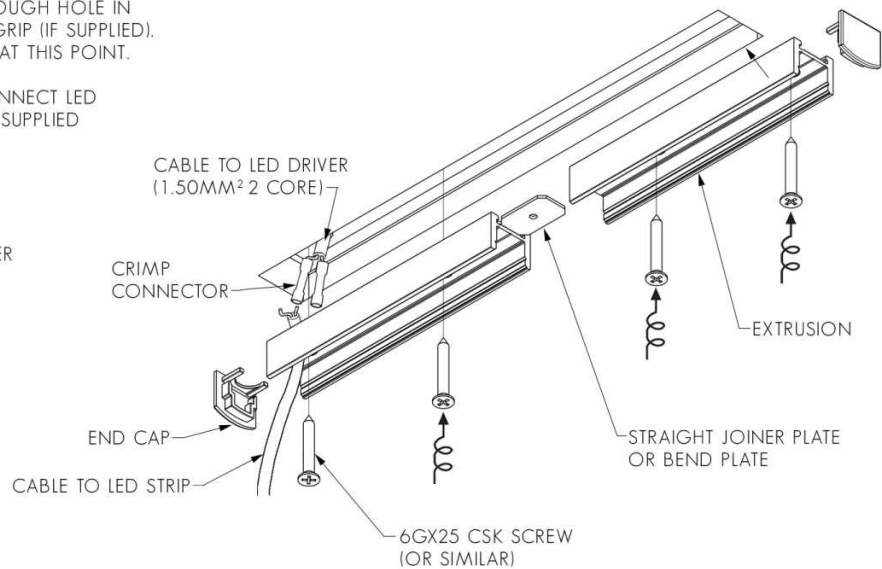


FIG. 1 - FASTEN CABLE USING CORD GRIP

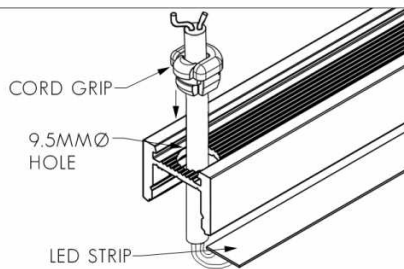


FIG. 2 - MAKE ELECTRICAL CONNECTION


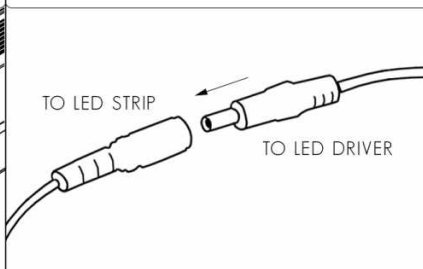


FIG. 3 - ENSURE EXTRUSION IS MOUNTED SECURELY

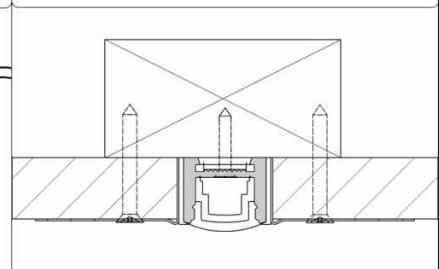

5

INSTALL LED STRIP AND DIFFUSER

1. **IMPORTANT:** BEFORE MOUNTING LED STRIP, CLEAN EXTRUSION USING AN ALCOHOL BASED CLEANER.

2. REMOVE BACKING FROM LED STRIP TO EXPOSE STICKY SURFACE. LAY LED STRIP INTO EXTRUSION, USING THE SMALL GROOVES IN THE BACK OF THE EXTRUSION AS A GUIDE. USE A DAB OF SILICON AT EACH END OF THE LED STRIP TO PREVENT ENDS FROM LIFTING OFF EXTRUSION.

3. CLIP DIFFUSER INTO EXTRUSION, ENSURING A FIRM CONNECTION (SEE FIG. 4).

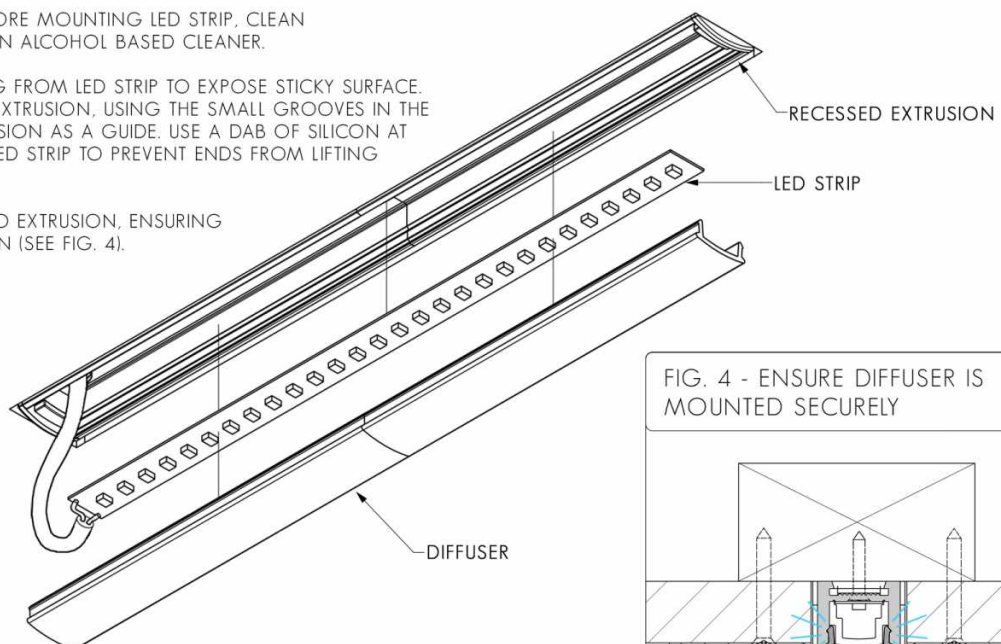


FIG. 4 - ENSURE DIFFUSER IS MOUNTED SECURELY

